OneShot®

Touch-Free Liquid Soap System

technical concepts
Innovative Hygiene Solutions

Sets the standard for reliability in counter-mounted dispensing systems utilizing patented SmartSensor™ technology to detect hands and automatically deliver the perfect amount of soap every time.

System Features:

- SmartSensor™ detects user's hand to automatically dispense OneShot™ of soap.
- Red LED light status blink to when refill is low.
- Yellow LED light status blink to when battery life is low.
- Reset button automatically resets low refill light and primes new soap refill.
- Optional spacer included if the sink rim is 3/4" high or greater.

System Specifications:

- Capacity: 800ml / 27oz. or 1600ml / 54oz.
- Bright polished chrome spout cover
- Mount through 1" (25mm) diameter hole in lavatory or countertop
- Maximum counter thickness 2" (50.8mm)
- Battery Requirements: 4 Alkaline D Cells (not included)
- Battery Life: 120,000 hand wash or 3 years, whenever comes first
- Activation range is 4" from sensor lens

OneShot Dispensers:

Stock #	Description
401310	Dispenser - Chrome
402073	Dispenser - Chrome (See Cover)
401527	Dispenser - Brilliant Brass
401528	Dispenser - Brushed Chrome
401832	Dispenser - Metal/Chrome Finish

Case Pack:4 Case Weight:10 lbs. Case Cube:1.15ft^3

Refill(s) Pix

OneShot Refills:

800ml	1600ml	Description
401313	**401543**	Pure & Natural Lotion Hand Soap
402363	**402364**	Free 'n Clean
401311	**401541**	Lotion w/Moisturizer
401312	**401542**	Antimicrobial

800ml - Case Pack: 4 Case Weight: 0.9lbs. Case Cube: 0.33ft^3
1600ml - Case Pack: 4 Case Weight: 1.8lbs. Case Cube: 0.5ft^3

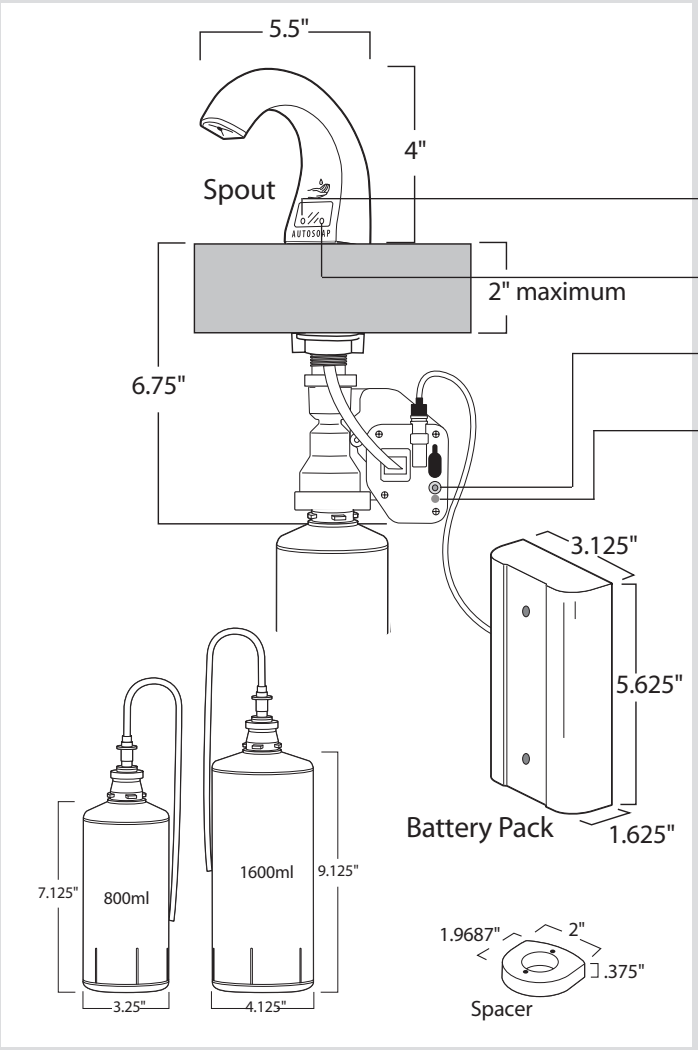

OneShot®

Specifications

OneShot System Features:

- Battery Indicator Yellow light appears when battery is low
- Refill Indicator Red light appears when soap is low
- Programmable Options 800ml or 1600ml soap refill settings
- Refill Reset Button Push after replacing refill

OneShot® Touch-Free Soap System
Quick Installation Instructions

1. Mount OneShot® dispenser in counter top.
2. Insure all components and wires are installed/ connected properly.
3. Before installing refill, insure the tube on the refill bottle is fully inserted into the actuator/pump assembly.
4. Next, unlock pump on refill by twisting counter-clockwise. Actuator will pop up.
5. Guide refill tube up through bottom of motor assembly and up the spout.
6. Lock soap refill into place by turning clockwise a 1/4 turn.
7. IMPORTANT - Press the Red refill reset button. This will automatically prime the soap refill bottle.

Compliance:
Designed to meet A.D.A. requirements.

Warranty:
3 years against defects in parts and workmanship.

THREE YEAR WARRANTY
FULLY GUARANTEED AGAINST DEFECTS IN PARTS AND WORKMANSHIP

ADA COMPLIANT

national® EVERYTHING WHOLESALE
Where Unsung Heroes Make It Happen™
800.647.2737 NationalEW.com